



CW MILL EQUIPMENT CO., INC.
P.O. Box 246 • Sabetha, Kansas 66534
(785) 284-3454 • FAX (785) 284-3601

FMK 47L3S-8

2005-2009 Ford F-250-550, 6.8L

2005-2009 Ford F-250-550, 5.4L

Triton 3-Valve

INSTALLATION NOTES W-W/O AC, W/Bearing Support

1. Disconnect the negative battery cable. Drain the engine coolant. Remove the upper radiator hose and overflow hose from the radiator. Remove the air duct. Remove the fan and fan shroud. (Fan nut has right hand thread.)
2. Clean any dirt or rust from the damper then install the pulley drive pulley (1) onto the damper with bolts (2) and lockwashers (3). Torque to 40 ft. lbs.
3. Remove the two nuts from the studs at locations "A" and "B". Remove the radio noise suppressors and torque the studs to 25 ft. lbs. (**IMPORTANT**) Replace the radio noise suppressors back onto the studs. Remove the bolt from the idler at location "C". If the heater hose at location "H" comes in contact with the bracket, cut off as indicated in the illustration. Expand the steel band holding the check valve. Push the check valve past the 90° bend and crimp the steel band back on the hose to secure the check valve. Reconnect the heater hose. The heater hose should now turn back toward the cab instead of up and then back. Re-route the wires that run across the front of the passenger side valve cover to allow the bracket to be installed without pinching any of the wires. Install the main bracket (4) onto the engine with the O.E.M. nuts at location "A" and "B", lockwasher (12) with bolt (11) at location "D", and lockwasher (12) with bolt (13) at location "C". Torque nuts and bolts to 25 ft. lbs.
4. Install idler (7) with bushing (10), flat washer (8), and bolt (9) onto the main bracket. Torque the bolt to 35-40 ft. lbs. Install alt. (22) onto bracket (4) w/bolts (114,18), spacer (21), LW's (19,15), nut (16), slide (17), and FW (20). Install the tensioner (5) with bolt (6). Torque to 25 ft. lbs. Install the drive belt according to the belt diagram. Install the fan spacer nut (23).
5. **08 & 09 Models:** Replace the fan and remove the protective cardboard if used. From underneath pull the fan shroud back until it snaps into place. Remove the resonator from the air duct as shown in the illustration. Connect the battery cable.
05-07 Models: Replace the fan and fan shroud. Install the radiator hose and overflow hose. Replace the air duct. Connect the battery cable and replace the engine coolant.
6. Make certain any wires that were disturbed during installation do not come in contact with any hot or moving parts. Run the engine and check for proper belt tracking. Adjust if necessary.

NOTE: On 6.8L V-10 trucks equipped with push button 4 wheel drive, an additional bracket kit is required to relocate the vacuum canister. Part # FMB474A


FMK 47L3S-8

2005-2009 Ford F-250-550, 6.8L

2005-2009 Ford F-250-550, 5.4L

Triton 3-Valve


W-W/O AC, W/Bearing Support

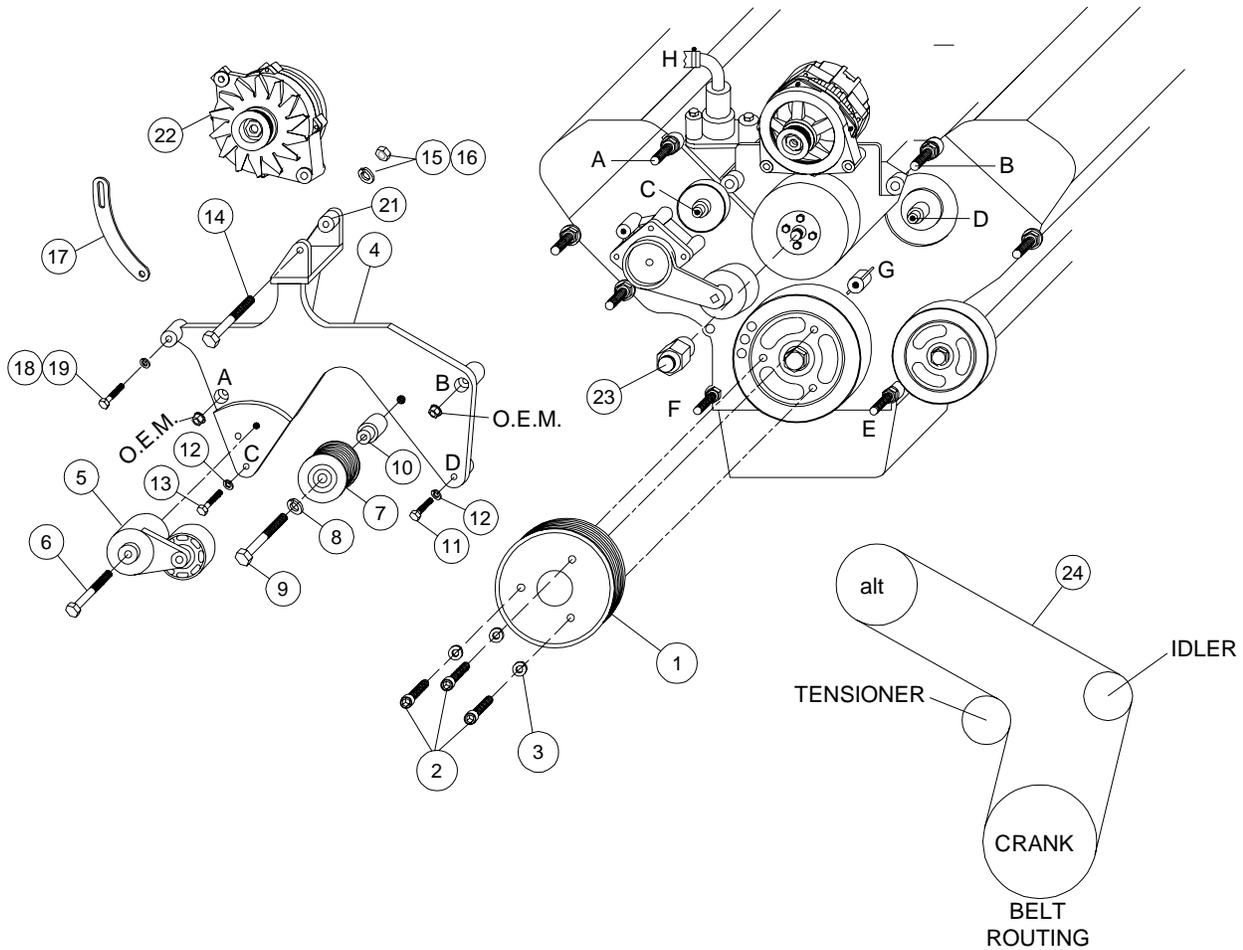


PARTS LIST

- | | |
|----------------------|------------------------------------|
| 1. FPC 378 (1) | 16. 7/16 Nut (1) |
| 2. 10mm x 60mm (3) | 17. L3SB1 (1) |
| 3. 10mm LW (3) | 18. 3/8 x 1-1/4 (2) |
| 4. FMB47L3S-8 (1) | 19. 3/8 LW (2) |
| 5. 89200B (1) | 20. 5/16 FW (1) |
| 6. 10mm x 80mm (1) | 21. SP88-.500 (1) |
| 7. GPCD8 (1) | 22. Alternator (Sold Separately) |
| 8. 12mm FW (1) | 23. FSK37R (used on 5.4L only) (1) |
| 9. 12mm x 75mm (1) | FSK6.8A (used on 6.8L only) (1) |
| 10. FMB 473 (1) | 24. Dayco 5080635 (1) |
| 11. 8mm x 35 (1) | 25. Aluminum Plug 1012646 (5.4L) |
| 12. 8mm LW (2) | 1012647 (6.8L) |
| 13. 8mm x 45mm (1) | 26. Rubber Grommet 1013038 (5.4L) |
| 14. 7/16 x 5-1/2 (1) | 1007870 (6.8L) |
| 15. 7/16 LW (1) | |

MODIFICATIONS SHEET

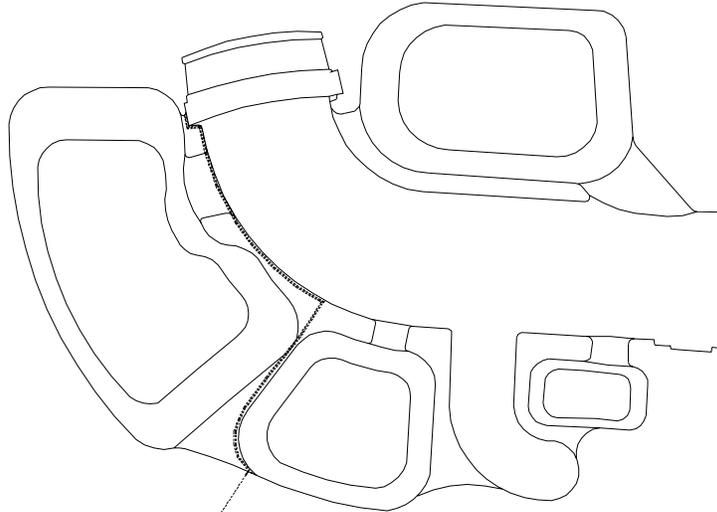


5.4L TRITON
CUT HERE

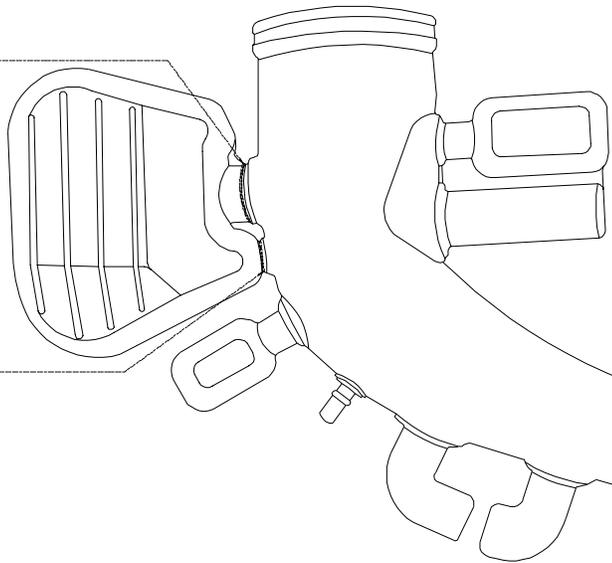

6.8L TRITON
CUT HERE

6.8L TRITON
CUT HERE

**2009 AND NEWER
MODIFICATION ONLY**



CUT ALONG LINE.
APPROX. 1/2"

